


AD21CN-M

Munio outlet front grille



Munio outlet front grille

AD21CN-M

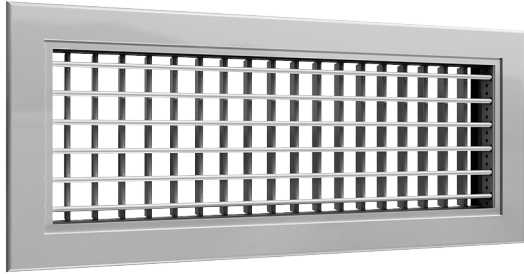

Description


AD21CN-M is an adjustable double deflection grille made of aluminium. With adjustable blades, the grille is very useful for air supply and can be adapted to the required throw and air spread pattern. AD21CN-M should be used as the standard outlet front grille for the Munio active chilled beam. AD21CN-M is supplied with springs for installation into the Munio telescope extension piece.

For more information please refer to "[Munio - Active Chilled Beam](#)".

Maintenance

The grille can be removed easily to gain access to the Munio plenum. For full maintenance instruction please check [Munio installation instruction](#) (www.lindQST.com). The external parts of the grille should be wiped with a damp cloth.

Dimensions

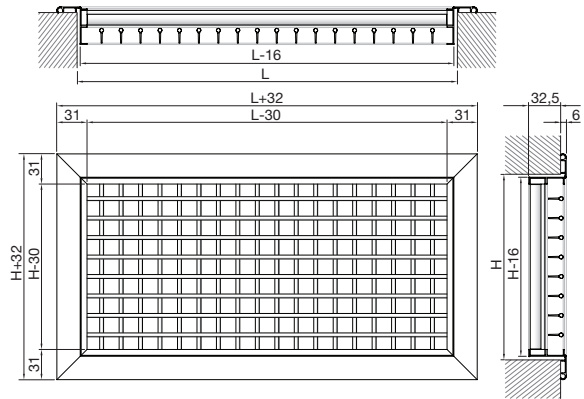

| L x H mm | Free area m ² | Weight kg |
|-------------|-----------------------------|--------------|
| 800 x 100 | 0,046 | 1,00 |
| 1000 x 100 | 0,066 | 1,40 |
| 1200 x 100 | 0,078 | 1,60 |
| 1400 x 100 | 0,092 | 1,90 |

Ordering example

Product **AD21CN-M** **aaa** **bbb** **cccc**

Type _____

L - measure _____


H - measure _____

Grilles standard finish:
 - - - - Anodized aluminium
 9010 RAL 9010, gloss 30
 9003 RAL 9003, gloss 30
 xxxx On request, other RAL colour

Materials and finish

Grille: Aluminium
 Standard finish: RAL 9003 or RAL 9010.

The grille is available in natural anodised finish and in other colours. Please contact Lindab's sales department for further information.

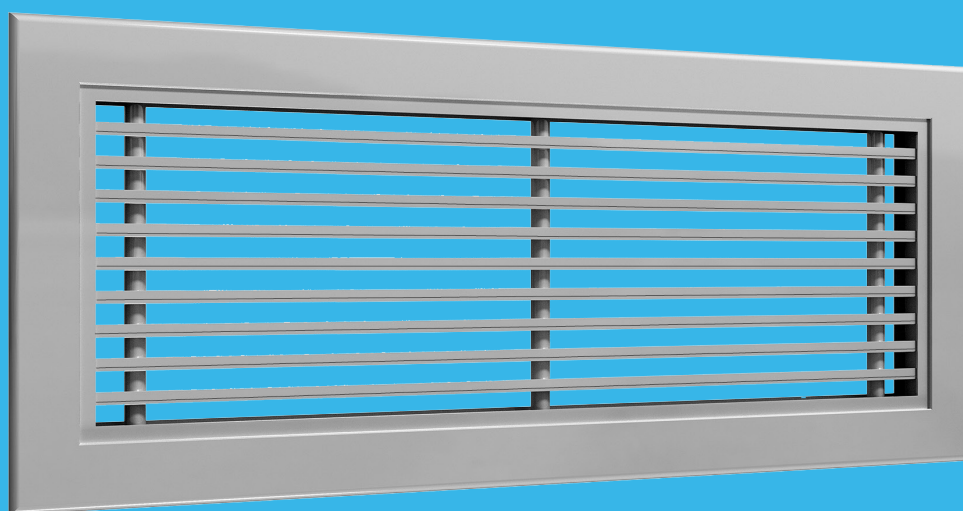


AL21CN-M

Munio outlet front grille



Munio outlet front grille

AL21CN-M

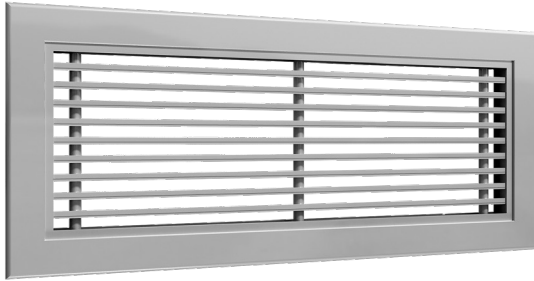

Description

AL21CN-M is a rectangular aluminium grille with fixed horizontal 15° bended bars and additional vertical directional bars for regulation of distribution pattern. AL21CN-M is used as a outlet front grille for the Munio active chilled beam. It is supplied as a standard with springs for installation into the Munio telescope extension piece.

For more information please refer to "[Munio - Active Chilled Beam](#)".


Maintenance

The grille can be removed easily to gain access to the Munio plenum. For full maintenance instruction please check [Munio installation instruction](#) (www.lindqst.com). The external parts of the grille should be wiped with a damp cloth.

Ordering example

| | | | | |
|---------------------------------|------------------------------|------------|------------|-------------|
| Product | AL21CN-M | aaa | bbb | cccc |
| Type | | | | |
| L - measure | | | | |
| H - measure | | | | |
| Grilles standard finish: | | | | |
| ---- | Anodized aluminium | | | |
| 9010 | RAL 9010, gloss 30 | | | |
| 9003 | RAL 9003, gloss 30 | | | |
| xxxx | On request, other RAL colour | | | |

Dimensions

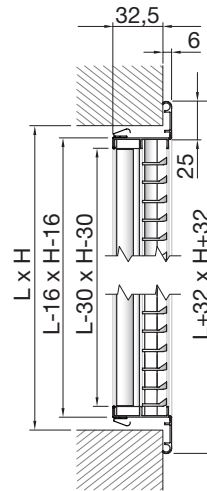

| L x H mm | Free area m ² | Weight kg |
|-------------|-----------------------------|--------------|
| 800 x 100 | 0,048 | 1,00 |
| 1000 x 100 | 0,060 | 1,40 |
| 1200 x 100 | 0,073 | 1,60 |
| 1400 x 100 | 0,085 | 1,90 |

Materials and finish

Grille: Aluminium
Standard finish: RAL 9003 or RAL 9010.

The grille is available in natural anodised finish and in other colours. Please contact Lindab's sales department for further information.