

Centrifugal grille fascia

CGF



Description

A centrifugal fan to extract air directly through the wall or through a small ducting system. Suitable for wall and ceiling mounting. Comes complete with backdraft shutter to prevent the ingress of air or external odours.

Standard version with options of, Timer, humidity sensor, and PIR sensor. Easy to remove washable filter. Made of ABS material with IPX4 protection.


Alternate Versions:

- CGF-B As above
- CGF-T Automatic run on timer with setting of 2-25 minutes
- CGF-HT Automatically starts the fan when the humidity raises above the preset level. Settings available from 40%-90% RH
- CGF-PIR PIR sensor automatically starts the fan when presence is detected within the room

Ordering example




Dimensions

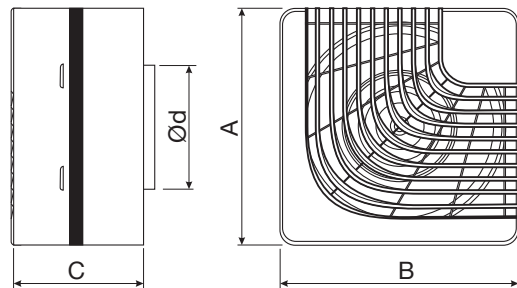

| Product | A mm | B mm | C mm | Ød mm | m kg |
|---------|------|------|-------|-------|------|
| CGF | 184 | 184 | 101,5 | 98 | 0,90 |

Technical data

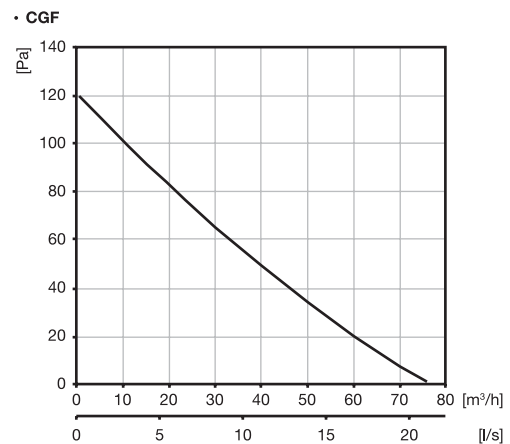

Centrifugal grille fascia

CGF

Technical data

| Product | Frequency Hz | Voltage V | Electric Power Input W | Current A | r.p.m | Maximum air capacity m ³ /h | Sound pressure level at 3 m dB(A) | Max. operating temperature °C | SEC class | IP |
|---------|-----------------|--------------|---------------------------------|--------------|-------|--|--|--|-----------|----|
| CGF | 50 | 220-240 | 19 | 0,13 | 2200 | 75 | 36 | +40 | * | X4 |

(*): Regulation 1254/2014 does not apply if electric power input < 30 W

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18