



Flexible duct, insulated

ISODEC

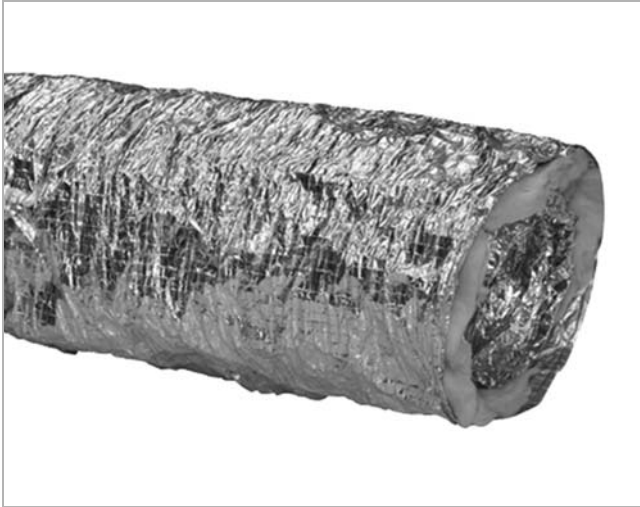

Dimensions

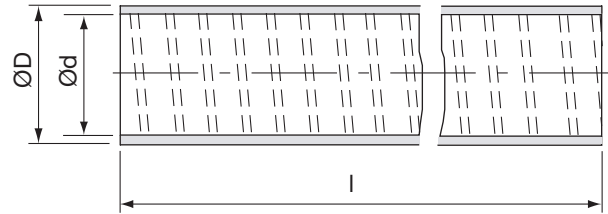

Description

ISODEC is a flexible duct made of non-combustible wool ($t = 25 \text{ mm}$, $d = 16 \text{ kg/m}^3$), internally faced with a duct made of aluminium, reinforced with a spiral steel wire and externally faced with a vapor barrier made of reinforced aluminium foil.

Withstands temperatures from -30°C to $+250^\circ\text{C}$.

Ød nom	ØD [mm]	l mm	m [kg]/m
80	130	10000	0,55
100	150	10000	0,75
125	175	10000	0,90
160	210	10000	1,20
180	230	10000	1,50
200	250	10000	1,80
250	300	10000	2,16

Ordering example

Product	ISODEC	125
Type		