

Bend


BTR 30°



Description

Pressed and seam welded bend.

Dimensions

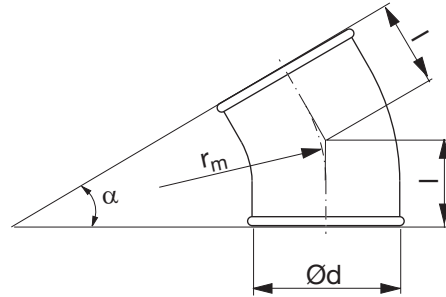

$$r_m \approx 1 \cdot d$$

| Ød nom | t mm | r _m mm | l mm | m kg |
|-----------|---------|----------------------|---------|---------|
| 80 | 0,5 | 100 | 57 | 0,20 |
| 100 | 0,5 | 100 | 57 | 0,20 |
| 125 | 0,6 | 125 | 63 | 0,25 |
| 140 | 0,7 | 140 | 68 | 0,40 |
| 150 | 0,7 | 150 | 70 | 0,34 |
| 160 | 0,7 | 160 | 73 | 0,50 |
| 180 | 0,7 | 180 | 73 | 0,60 |
| 200 ** | 0,7 | 200 | 106 | 0,80 |
| 224 ** | 0,7 | 225 | 112 | 0,77 |
| 250 ** | 0,7 | 250 | 119 | 1,10 |

** 2 swaged-on ends

Ordering example

