


Semiflexible double duct

SRFC



Dimensions

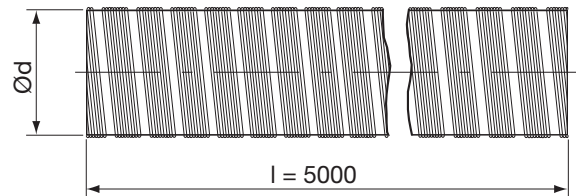

Description

Double-layer duct wall.

Applications

Suitable for mechanical air supply systems and air conditioning systems

Advantages

- Small storage and transport volume.

Technical data

Duct material	Aluminium + aluminium (AL)
Minimum bending radius.....	1×d
Maximum temperature	+200 °C
Fire resistance	Not flammable in accordance with DIN 4102 class A1
Delivery length:	
Ø 63–315	Compressed to 1,2 m
Standard length.....	5 m

Ød nom	O πd m	A πd ² /4 m ²	Max. pres- sure Pa	m kg
63	0,198	0,003	±3150	1,30
80	0,251	0,005	±3150	1,70
100	0,314	0,008	±3150	2,10
125	0,393	0,012	±3150	2,60
140	0,440	0,015	±3150	2,90
150	0,471	0,018	±2500	3,10
160	0,503	0,020	±2500	3,30
180	0,565	0,025	±2500	3,70
200	0,628	0,031	±2500	4,20
224	0,704	0,039	±2500	4,60
250	0,785	0,049	±2000	5,20
280	0,880	0,062	±2000	5,80
300	0,942	0,071	±2000	6,30
315	0,990	0,078	±2000	6,50

Ordering example

Product code	SRFC	160
Dimension Ød		