

Perforated diffuser

PC6



Description

PC6 is a circular perforated diffuser that can be used for both supply air and exhaust. The diffuser is suitable for the horizontal supply of cooled air. The diffuser can also be used for low impulse and is therefore useful for the supply of replacement air in environments with high rates of air exchange. Installing this diffuser in a plenum box type MBB can help to achieve a stable flow of air to the diffuser as well as realise the potential for individual adjustment.


- Suitable for both supply and exhaust air
- Discrete design
- Can be used for low impulse supply air

Order code

Product	PC6	a	bbb
Type			
PC6			
Functional use			
S = Supply air			
E = Exhaust			
L = Low-impulse			
Connection dim.			
Ø125-315			

Example: PC6-S-200

Dimensions

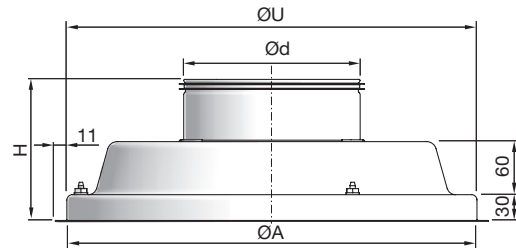

PC6 Ød mm	ØA mm	H mm	ØU* mm	m kg
125	360	140	370	3.90
160	460	140	470	5.30
200	460	140	470	5.40
250	540	140	550	7.40

* ØU = ceiling grid opening

PC6-S



Materials and finish

Material: Galvanised steel
 Standard finish: Powder-coated
 Standard colour: RAL 9003 Gloss 30

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

