

Swirl diffuser

RC15



Description

RC15 is a circular swirl diffuser with adjustable bars. The diffuser can be used for both supply and exhaust air. The swirl pattern ensures high induction and a large dynamic range, and is therefore ideal for the horizontal supply of very cold air. The diffuser can also be set to a vertical supply air pattern, enabling supply of heated air. Installing this diffuser in a plenum box type MBB can help to achieve a stable flow of air to the diffuser as well as realise the potential for individual adjustment.


- Large dynamic range
- High induction
- Suitable for cooling at very low temperatures
- Horizontal or vertical supply air pattern
- Can be used for both supply air and exhaust

Order code

Product	RC15	a	bbb
Type			
RC15			
Functional use			
S = Supply air			
E = Exhaust ()			
Connection dim.			
Ød 160-315			

Example: RC15-S-160

Dimensions


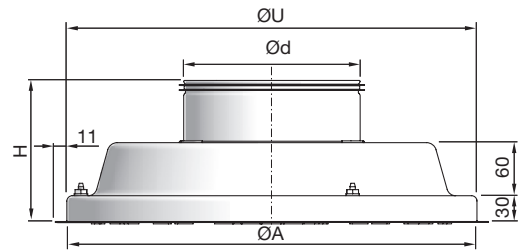


RC15 Ød mm	ØA mm	H mm	ØU* mm	m kg
160	360	140	370	5.30
200	360	140	370	5.40
250	460	140	470	7.40

* ØU = ceiling grid opening

Bar setting



Horizontal




RC15-S



Vertical



RC15-E



Materials and finish

Material:	Galvanised steel
Standard finish:	Powder-coated
Standard colour:	RAL 9003 Gloss 30
Bars (Only RC15-S):	Black ABS plastic

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

