


Semiflexible double duct silencer

SLFA 50



Dimensions

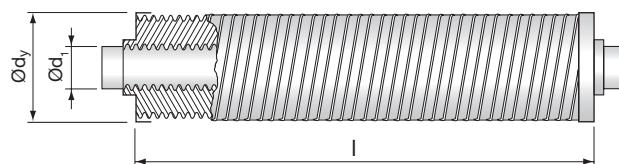

Description

SLFA 50 is a flexible silencer that can be adapted to any installation situation. The bendability of the silencer allows adaptation to very confined spaces and difficult wiring. Silencers are made from 2-layer, flexible aluminium tubes of type SRF. The inner tube is micro-perforated and between the inner and outer tubes is a 50 mm thick attenuation material layer of glass wool.

The attenuation material reduces the noise passing through the silencer.

The ends of the silencer are covered with aluminium gables. The duct connections fits inside ducts.

SLFA 50 comes in the dimensions Ø80-250 mm and 1000 mm in length.

(Also available in lengths of 750, 1250, 1500 and 2000 mm). The silencers can withstand temperatures up to 200 °C.

Order code

Product	SLFA	aaa	bbbb	50
SLFA				
Connection dim. Ød ₁ nom				
80 - 315 mm				
Length in mm				
750 - 2000 mm				
Insulation thickness				
50 mm				

Example: SLFA - 160 - 1250 - 50

Ød ₁ nom mm	I mm	Attenuation in dB for centre frequency Hz								Ød _y mm	m kg
		63	125	250	500	1k	2k	4k	8k		
80	750									190	
80	1000	3	13	19	30	47	58	33	28	190	1,10
80	1250									190	
80	1500									190	
80	2000									190	
100	750									210	
100	1000	2	11	16	28	46	58	36	36	210	1,30
100	1250									210	
100	1500									210	
100	2000									210	
125	750									235	
125	1000	1	7	13	24	41	45	29	28	235	1,70
125	1250									235	
125	1500									235	
125	2000									235	
160	750									260	
160	1000	1	5	10	21	39	30	20	18	260	1,90
160	1250									260	
160	1500									260	
160	2000									260	
200	750									310	
200	1000	3	4	9	16	32	22	15	15	310	2,40
200	1250									310	
200	1500									310	
200	2000									310	
250	750									365	
250	1000	2	4	8	16	33	15	11	12	365	3,00
250	1250									365	
250	1500									365	
250	2000									365	
315	750									410	
315	1000	2	3	6	12	25	11	8	11	410	3,40
315	1250									410	
315	1500									410	
315	2000									410	

