

Reducer


INRCFU



Description


The reducer is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension ($\varnothing d_2$) and female connection at the inner dimensions ($\varnothing d$).

Dimensions

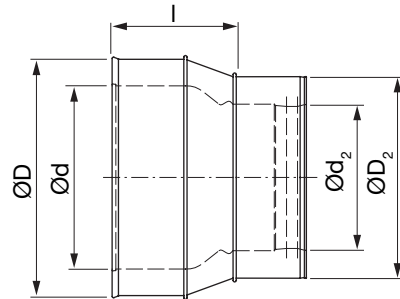

$\varnothing d$ nom	$\varnothing d_2$ mm	$\varnothing D$ nom	$\varnothing D_2$ mm	l mm	m* kg
100	80	132	112	63	0,33
125	80	157	112	75	0,41
125	100	157	132	66	0,40
160	80	192	112	94	0,65
160	100	192	132	85	0,56
160	125	192	157	72	0,57
180	80	200	112	212	1,08
180	100	200	132	185	1,04
180	125	200	157	151	0,97
180	160	200	192	103	0,79
200	80	232	112	240	1,33
200	100	232	132	92	0,76
200	125	232	157	92	0,73
200	160	232	192	78	0,69
200	180	232	200	103	0,91
224	80	260	112	277	1,52
224	100	260	132	245	1,58
224	125	260	157	211	1,47
224	160	260	192	163	1,32
224	180	260	200	135	1,19
224	200	260	232	107	1,07
250	80	280	112	332	1,95
250	100	280	132	301	2,02
250	125	280	157	137	1,36
250	160	280	192	115	1,13
250	180	280	200	191	1,10
250	200	280	232	103	1,08
250	224	280	260	131	1,36
280	80	315	112	379	2,19
280	100	315	132	347	2,26
280	125	315	157	308	2,36
280	160	315	192	260	2,19
280	180	315	200	232	2,06
280	200	315	232	205	1,97

Order code

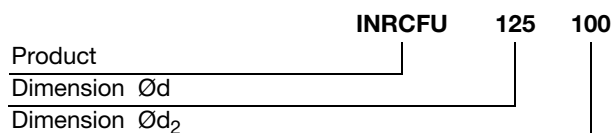

Reducer

INRCFU

Ød nom	Ød₂ mm	ØD nom	ØD₂ mm	l mm	m* kg
280	224	315	260	172	1,80
280	250	315	280	136	1,76
300	80	355	112	410	2,47
300	100	355	132	379	2,54
300	125	355	157	335	2,72
300	160	355	192	287	2,50
300	180	355	200	260	2,36
300	200	355	232	232	2,28
300	224	355	260	200	2,12
300	250	355	280	164	2,07
300	280	355	315	123	1,89
315	80	355	112	425	2,74
315	100	355	132	394	2,82
315	125	355	157	356	3,00
315	160	355	192	308	2,77
315	180	355	200	281	2,61
315	200	355	232	253	2,53
315	224	355	260	220	2,36
315	250	355	280	184	2,31
315	280	355	315	143	2,11
315	300	355	355	116	1,99

* = weight can vary ±10%.

