


Brackets

WCZ

Z-fastener

Surface finish: Electro zinc plated.

| Dim | Thickness mm |
|-----|-----------------|
| 25 | 4 |



Ordering example

| | | |
|-----------|-----|----|
| Product | WCZ | 25 |
| Dimension | | |

WCZGM


Z-fastener with vibration damper

Quick installation of rectangular ducts. Supplied with sound reduction mounting compliant with DIN 4109.

Fixing with blind rivets or self drilling screws.


Easy height adjustment by using M8 threaded rod and hex nuts. Material 35 x 2,0 mm.

Surface finish: Electro zinc plated.

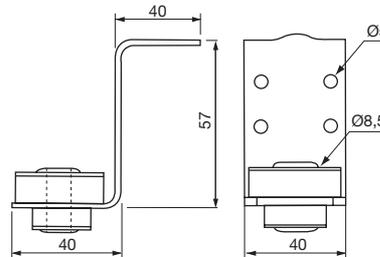

Ordering example

| | |
|---------|-------|
| Product | WCZGM |
|---------|-------|



WCVG


Sheet metal roof attachment without nut with rubber

Suspension bracket designed to suspend ductwork with threaded rods of maximum 8 mm. Allows fixing against trapeze type ceilings.

Supplied with a moulded elastomeric element which prevents the transmission of vibrations.

For best vibration isolation, load should not exceed 40 kg. Material: 25 x 2,5 mm.

Surface finish: Electro zinc plated.

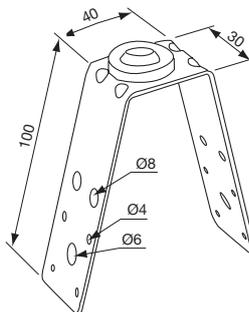

Ordering example

| | |
|---------|------|
| Product | WCVG |
|---------|------|

