

Semiflexible duct

SRF1C



Description

Single-layer duct wall.


Advantages

- Small storage and transport volume.
- No toxic gases are emitted in case of fire.
- Tested on fire resistance.

Technical data

Duct material.....	Aluminium
Minimum bending radius.....	1×d
Maximum temperature.....	+200 °C
Fire resistance.....	Not flammable in accordance with DIN 4102 class A1
Standard length.....	5 m also available in 3 m

Dimensions

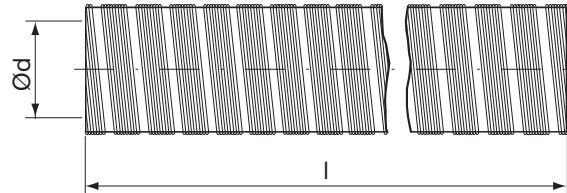

Ød nom	O πd m	A πd ² /4 m ²	l mm	m kg
80	0,251	0,005	5000	0,67
100	0,314	0,008	5000	0,83
125	0,393	0,012	5000	1,04
140	0,440	0,015	5000	1,17
150	0,471	0,018	5000	1,25
160	0,503	0,020	5000	1,33
180	0,565	0,025	5000	1,79
200	0,628	0,031	5000	1,99
224	0,704	0,039	5000	2,23
250	0,785	0,049	5000	2,49
280	0,880	0,062	5000	2,79
300	0,942	0,071	5000	2,99
315	0,990	0,078	5000	3,14
355	1,12	0,099	5000	3,54
400	1,26	0,126	5000	3,99

Ordering example

	SRF1C	160	5000	A
Product				
Dimension Ød				
Length l				
Material				

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18