

Access door

RD




Description

Access door, which fits on the flat side of a rectangular duct. Consists of a door and a frame. The door has a 25 mm thick high density insulation. The frame is attached to the duct wall by means of fixing tabs. Both door and frame are supplied with a rubber gasket.

Can achieve maximum tightness class C.

Dimensions

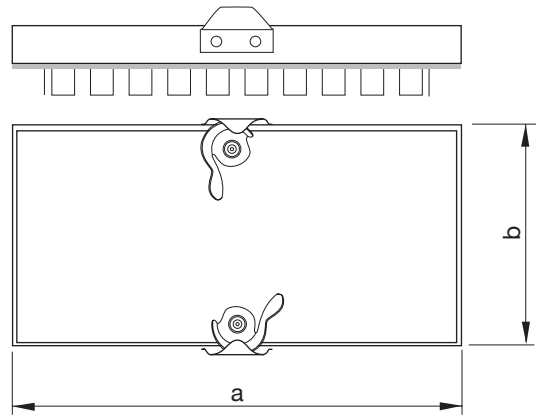

| Type | a mm | b mm | m kg |
|------|------|------|------|
| RD31 | 300 | 150 | 1,47 |
| RD44 | 400 | 300 | 2,46 |
| RD50 | 500 | 500 | 4,30 |

Ordering example

| | | | | |
|---------------|---|-------------|------------|------------|
| | | RD44 | 400 | 300 |
| Product | | | | |
| Largest side | a | | | |
| Smallest side | b | | | |

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18