


Podpora kanału


DH

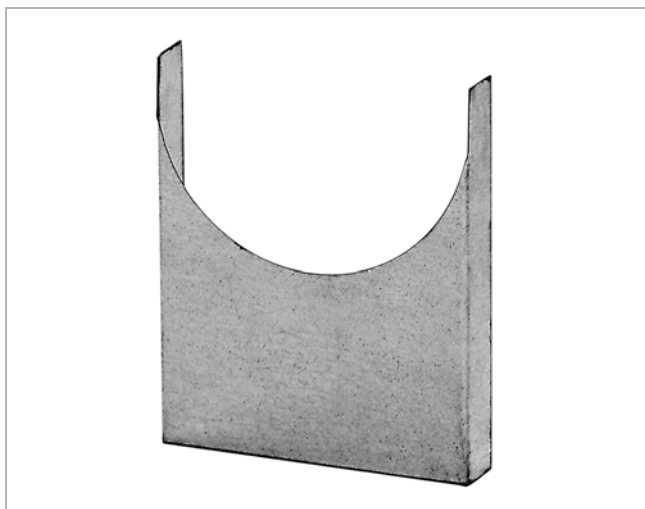


Opis

Element stosowany do podpierania połączeń kanałów.

Wyposażony w otwory montażowe w podstawie.



Wymiary

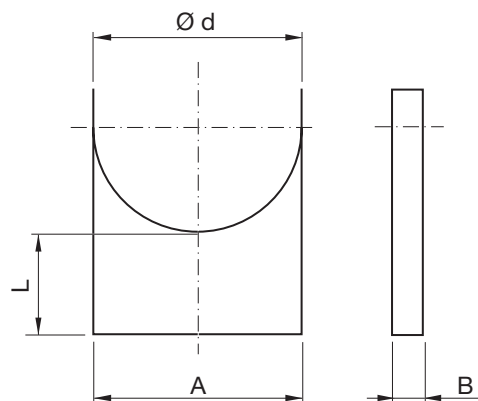

Ød nom	A mm	B mm	L mm	L _{min} - L _{max} ** mm	m kg
63	66	25	75		0,08
63	66	30	100	100-200	0,09
80	83	25	75		0,09
80	83	30	100	100-200	0,11
100 *	103	25	75	100-200	0,10
100 *	103	30	100	100-200	0,12
125 *	128	25	75	100-200	0,12
125 *	128	30	100	100-200	0,15
160 *	163	25	75	100-200	0,15
160 *	163	30	100	100-200	0,18
200 *	203	25	75	100-200	0,25
200 *	203	30	100	100-200	0,29
250 *	253	25	75	100-200	0,30
250 *	253	30	100	100-200	0,35
315	318	25	75		0,39
315	318	30	100	100-250	0,46
400	403	25	75		0,50
400	403	30	100	100-250	0,59
500	503	25	75		0,65
500	503	30	100	100-250	0,76
630	633	25	75		0,87
630	633	30	100	100-250	1,02

* Wzmocnione

Przykładowe zamówienie

Produkt	DH	250	100
Wymiary Ød			
Wysokość l			