

# Duct suspension




## S4B

### Rectangular plain washer

Surface finish: Hot dipped galvanized.

Dim Ød <sub>2</sub>	b mm	Thickness mm
9	25	3
11	30	3

### Ordering example

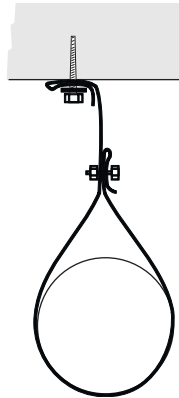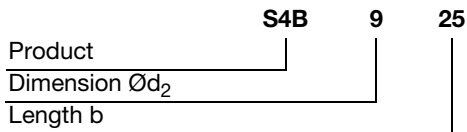

## OSM

### Hexagonal studding connector

Used together with threaded rod to reduce wastage to a minimum.  
Threaded in both ends with a stop in the middle.


Dim	Length mm	Material
M8	40	FZB
M10	50	FZB
M12	50	FZB
M8	40	4404
M10	50	4404



### Max recommended load for different fire classes.

Installation		Ventilation system					Smoke control system
Dim	Length	R0 no fire class. kg	R15 kg	R30 kg	R45 kg	R60 kg	600 °C 120 min kg
M8	25	100	100	100	-	-	100
M8	40	100	100	100	-	-	100
M10	50	158	158	100	100	100	158
M12	50	158	158	100	100	100	158

### Ordering example

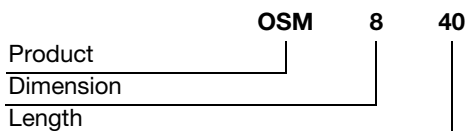

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18