

# Schalldämpfer


# SLCU 50




## Beschreibung

Isolierdicke 50 mm. Gegenüber SLU abweichende Mineralwollpackung mit teilweise höherer Dämpfung.

## Technische Daten

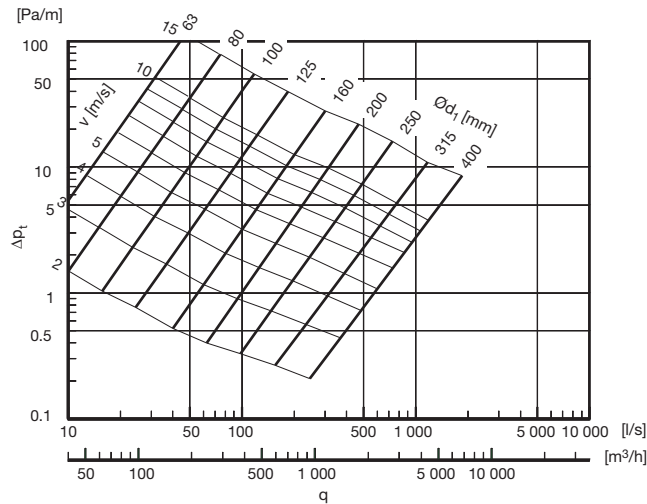

## Dimensionen

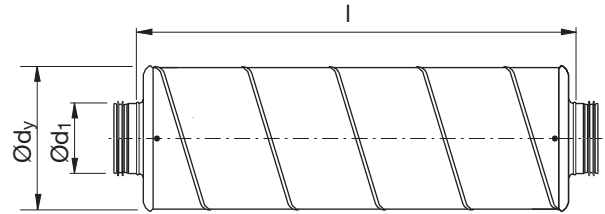

$\varnothing_{d_1}$ nom	Länge nom	Dämpfung in dB der Mittenfrequenz in Hz								$\varnothing_{d_y}$ mm	l mm	m kg
		63	125	250	500	1k	2k	4k	8k			
63	300	0	6	11	18	28	39	40	24	170	300	1,55
63	600	0	5	15	25	48	49	49	33	170	600	2,55
80	300	5	5	8	15	28	29	23	16	190	300	1,92
80	600	5	7	12	26	41	50	48	24	190	600	3,14
80	900	5	9	17	37	50	50	50	32	190	900	4,61
80	1200	6	11	21	49	50	50	50	40	190	1200	5,73
100	300	2	2	6	14	21	25	20	11	210	360	2,28
100	600	4	3	11	24	36	49	34	17	210	660	4,09
100	900	5	4	15	34	50	50	48	23	210	960	5,18
100	1200	6	5	19	45	50	50	50	29	210	1260	6,46
125	300	2	2	6	13	16	20	15	10	235	365	2,66
125	600	3	3	9	23	30	40	22	14	235	665	4,39
125	900	4	4	12	33	45	50	30	17	235	965	6,20
125	1200	5	5	15	43	50	50	38	21	235	1265	7,47
160	300	1	2	4	10	12	15	8	8	270	375	2,98
160	600	2	3	7	19	27	29	14	11	270	675	5,37
160	900	2	4	10	28	42	43	20	15	270	975	7,48
160	1200	2	5	13	37	50	50	26	19	270	1275	9,23
200	300	1	2	5	8	10	11	5	5	325	385	4,11
200	600	2	3	7	16	21	23	9	8	325	685	6,90
200	900	2	4	8	24	32	34	13	10	325	985	9,74
200	1200	3	5	10	31	43	45	18	13	325	1285	12,0
250	600	3	2	7	13	17	16	8	6	365	600	8,55
250	900	3	4	8	20	26	23	10	8	365	900	11,7
250	1200	4	5	9	26	35	30	12	10	365	1200	15,0
315	600	0	2	6	11	14	9	4	5	427	600	11,3
315	900	1	3	7	16	22	12	6	7	427	900	15,6
315	1200	1	3	8	22	30	16	7	9	427	1200	20,3
400 *	600	0	3	4	6	8	4	4	4	508	600	20,5
400 *	900	1	3	5	10	13	7	5	6	508	900	26,8
400 *	1200	1	4	7	14	19	10	7	8	508	1200	30,0

\* Lieferung mit 2 losen Nippeln.

## Bestellbeispiel

	SLCU	125	600	50
Produktbezeichnung				
Dimension $\varnothing_{d_1}$				
Länge, nominal				
Isolierstärke				