


Flexible hose

THVTR



Dimensions

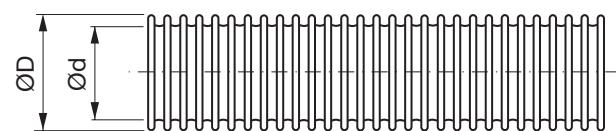

Description

Flexible hose, non-spiral, profiled wall construction, extruded ethylene-vinyl-acetate. The design means that the hose has an almost completely smooth interior under high vacuum, with consequent low pressure drop. This is because the open ridges on the inside of the hose are compressed at negative pressure.

Temperature range -45 to +65 °C

Ød mm	ØD mm	Min. bending radius mm	Max. permissibl e negative pressure kPa			I mm	m _I kg/m
			50	30000	0,20		
25	31	66	50	30000	0,30		
32	41	82	50	30000	0,40		
38	48	93	50	30000	0,50		
45	56	111	50	30000	0,60		
50	61	122	50	30000	0,80		
63	76	160	50	30000	1,10		
76	91	188	50	15000			

Ordering example

Product	THVTR	50
Dimension Ød		