


# Flexible insulated budget light duct

# FIBLD



## Dimensions

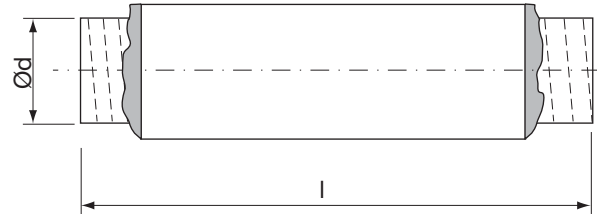

## Description

Multiple layer inner core insulated with glass wool, covered by a multiple layer outer jacket.

## Classification

M1

## Technical data

Duct materials:

inner wall (core).....	Multiple layers aluminium/ polyester supported by a bronze coated wire helix
insulation.....	25 mm glass wool
outer wall (jacket) .....	Multiple layers aluminium/ polyester
Temperature range .....	-30 to +125 °C
Standard length.....	10 m, other lengths on request
Packing.....	Individual box – 1 m

Ød nom	O πd m	A πd <sup>2</sup> /4 m <sup>2</sup>	l [mm]	Max. pressure Pa
100	0,320	0,008	10000	+3000
125	0,399	0,013	10000	+3000
160	0,509	0,015	10000	+3000
200	0,638	0,032	10000	+3000
315	0,990	0,078	10000	+3000

## Ordering example

