


Damper, non-return

DOSU



Dimensions

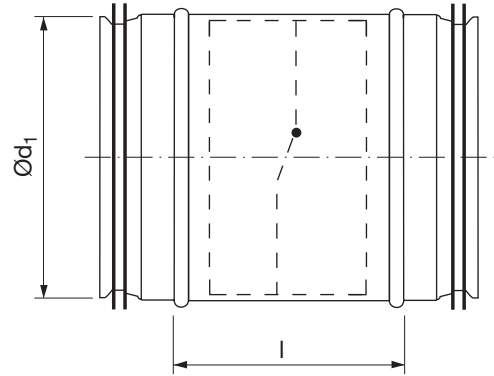

Description

One-way dampers are used to prevent natural back-flows. It can be mounted both vertically and horizontally (note the arrow marking) and are designed to be installed near the outlet.

At horizontal installation please make sure that the sticker (UP) is at the top.

Ød ₁ nom	l mm	m kg
80	130	0,40
100	130	0,50
125	130	0,60
160	130	0,80
180	130	0,90
200	130	1,00
250	245	1,90
315	245	2,40

Order code

