


Perforated diffuser - rectangular

CEA

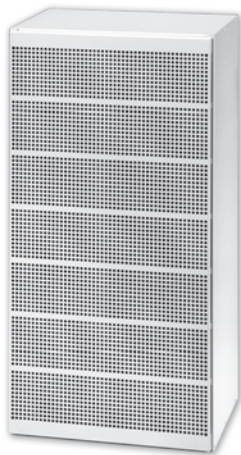

Description


Comdif CEA is a rectangular perforated displacement diffuser for installation against a wall or column. Behind the perforated front plate, CEA is equipped with individually adjustable nozzles, making it possible to alter the geometry of the near zone. The diffuser can be turned and has a circular duct connection (MF measure), so the diffuser can be connected at the top or bottom. The diffuser is suitable for the supply of large volumes of moderately cooled air.

- The diffuser is suitable for the supply of large volumes of air.
- The geometry of the near zone can be adjusted using adjustable nozzles.
- Plinths can be supplied as accessories.

Maintenance

The front plate can be removed from the diffuser, making it possible to clean the nozzles. The visible parts of the diffuser can be wiped with a damp cloth.


Ordering example



Order - accessories

Plinth: CEAZ - 2 - size

Dimension

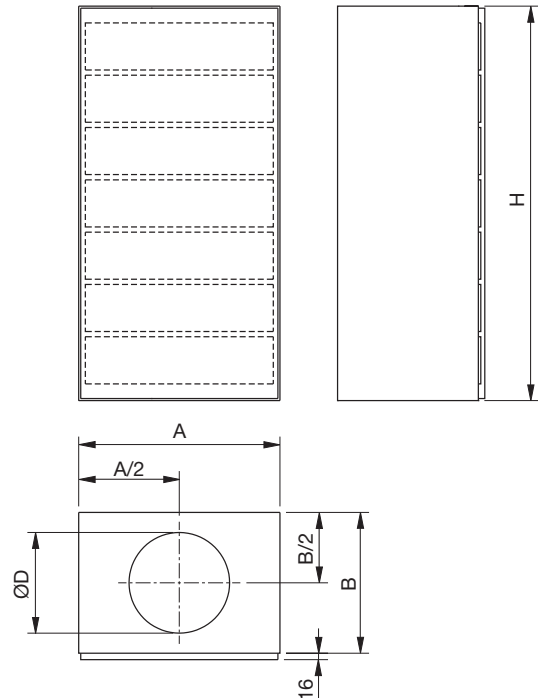

Size	A mm	B mm	ØD mm	H mm	Weight kg
2010	300	300	200	980	12.0
2510	500	350	250	980	24.0
3115	800	500	315	1500	80.0
4015	800	600	400	1500	96.0

Accessories

Can be supplied with plinth.

Materials and finish


Diffuser:	Galvanised steel
Nozzles:	Black plastic
Front plate:	1 mm galvanised steel
Standard finish:	Powder-coated
Standard colour:	RAL 9003 or RAL 9010 - white, gloss 30.

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

Perforated diffuser - rectangular

CEA

Technical data

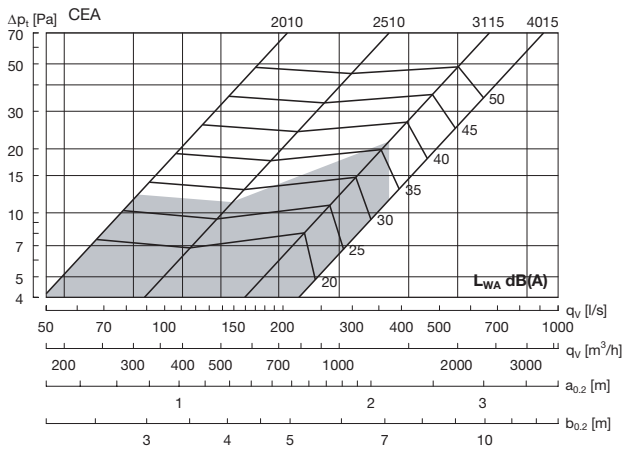

Recommended maximum volume flow.

The near zone is given at an under-temperature of -3 K to a maximum terminal velocity of 0.20 m/s.

Conversion to other terminal velocities - see table 1, correction of the near zone for -3 K and -6 K respectively.

Sound effect level

Sound effect level $L_w [dB] = L_{WA} + K_{ok}$


Size	Centre frequency Hz							
	63	125	250	500	1K	2K	4K	8K
2010	11	4	4	-1	-8	-14	-25	-37
2510	8	4	2	0	-6	-16	-27	-40
3115	14	6	3	-1	-8	-17	-29	-25
4015	11	3	2	1	-10	-18	-30	-37

Sound attenuation

Sound attenuation $\Delta L [dB]$ including end reflection.

Size	Centre frequency Hz							
	63	125	250	500	1K	2K	4K	8K
2010	10	6	1	4	5	3	4	4
2510	10	6	6	4	2	2	4	3
3115	9	6	5	3	3	4	4	5
4015	8	5	3	3	2	3	4	4

Nearzone

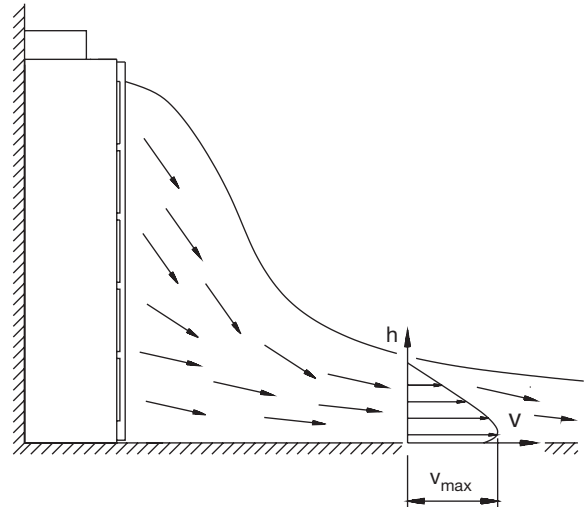

Large diffusion (factory setting)

Small diffusion

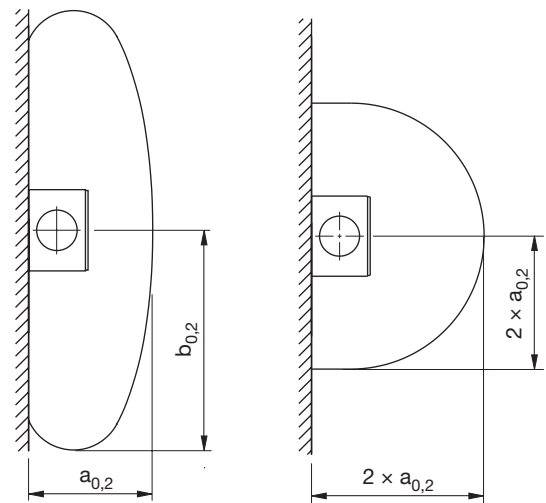


Table 1 Correction of the near zone ($a_{0,2}$, $b_{0,2}$)

Under-temperature $T_i - T_r$	Maximum velocity m/s	Mean velocity m/s	Correction factor
-3K	0.20	0.10	1.00
	0.25	0.12	0.80
	0.30	0.15	0.70
	0.35	0.17	0.60
	0.40	0.20	0.50
-6K	0.20	0.10	1.20
	0.25	0.12	1.00
	0.30	0.15	0.80
	0.35	0.17	0.70
	0.40	0.20	0.60