


Perforated diffuser

CBAL

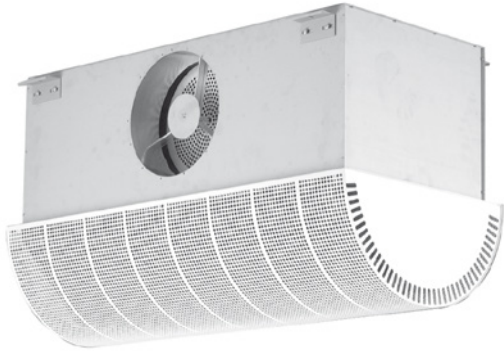

Description

CBAL is a low-impulse diffuser for ceiling installation. The diffuser is suitable for the supply of replacement air in laboratories, commercial kitchens, etc. The diffuser is equipped with adjustable nozzles behind the perforated face plate, allowing the dispersal pattern to be adjusted according to the conditions.

Maintenance



The face plate and nozzle tray can be removed from the diffuser to enable cleaning of the nozzles. The visible parts of the diffuser can be wiped with a damp cloth.

Order code

Product	CBAL	bbbb
Type		
Size	1200 1800	

Dimension

L Size mm	A mm	ØD mm	Number of connections
1200	570	315	1
1800	500	315	2

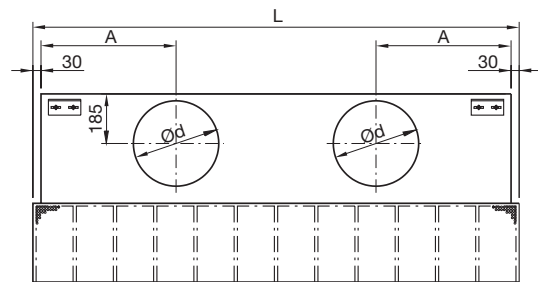

Materials and finish

Diffuser:	Galvanised steel
Nozzles:	Black ABS plastic
Standard finish:	Powder-coated
Standard colour:	RAL 9010 and 9003, gloss 30

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

Perforated diffuser

CBAL

Technical data

Supply air CBAL

