


# Damper with flow meter

FMDU



## Dimensions

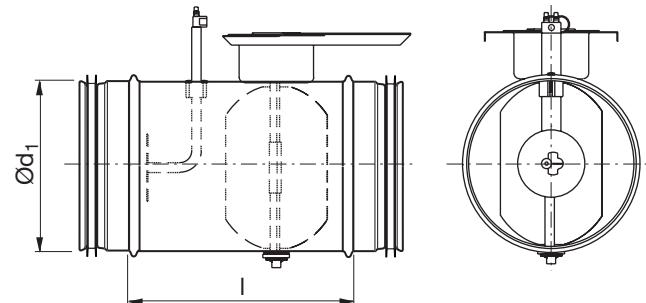

## Description

### Applications

The meter is suitable both for setting up and for continuous flow measurement. It is intended for permanent installation and must therefore be specified at the design stage.

There is a separate assembly, measuring, balancing and maintenance instruction for this product.

Ø 80–630 fulfills tightness class 0 and pressure class A .

### Design

The meter consists of a regulating shutter and a centrally located measurement plate. Each measurement nozzle has a removable plastic plug which prevents dirt from entering. It also eliminates air leakage when measurement is not done.

The unit permits insulation of up to 50 mm thickness to be installed without concealing the measurement nipples or the label plate.

The plate can be rotated for best legibility, irrespective of the way the unit is installed and can easily be removed, to be located away from the unit. The cup around the damper knob allows insulation up to 50 mm thick to be used. If thicker insulation is needed, add the special insulation cup IK.

### Advantages

- Short installation length.
- Suitable for use with insulation.

The unit has components which partly block the duct system.

## Ordering example

FMDU 200

Product

Dimension Ød<sub>1</sub>

Ød <sub>1</sub> nom	I [mm]	m [kg]
80	165	0,66
100	165	0,76
125	165	0,88
160	165	1,08
200	230	1,44
250	275	2,10
315	275	2,65
400	450	6,10
500	520	11,4
630	570	16,0



Lindab reserves the right to make changes without prior notice

2020-09-10


# Damper with flow meter

FMDU

## Technical data

### Flow graph for balancing

The curves show the flow,  $q$ , as a function of the pressure difference in the measurement nozzles. Flow data for dimensioning differs from this graph.


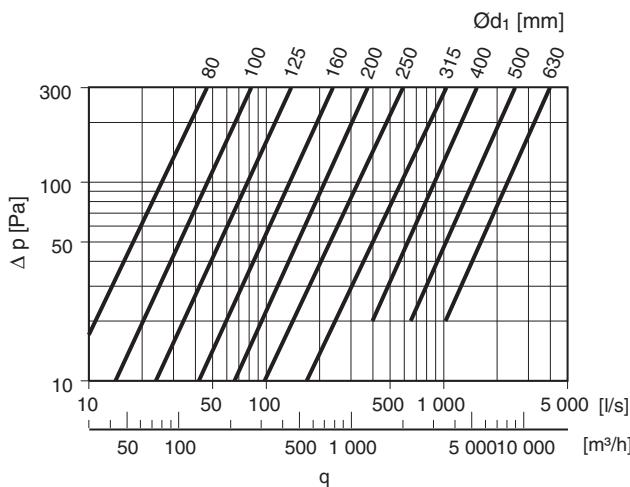


### Measurement function

By measuring the pressure difference,  $D_p$ , between the measurement nozzles, you can derive the flow in the duct by means of the equation on the units plate.

### Measurement accuracy

If the velocity profile is asymmetric, the measurement values can differ from the ideal values. For this reason, the flow meter should never be located right up to any flow disturbance. The method error in the table below will differ, depending on the distance to the flow disturbance.

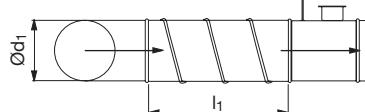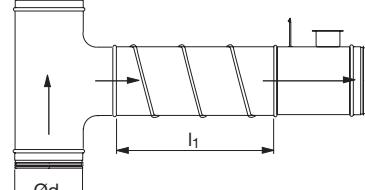$l_1$ = straight distance before meter	Method error $m_2$	
Type of disturbance	5%	10%
A 90° bend		
	$6 \cdot d_1$	$0 \cdot d_1$
A branch		
	$6 \cdot d_1$	$4 \cdot d_1$
$l_2$ = straight distance after meter	$1 \cdot d_1$	$1 \cdot d_1$



Lindab reserves the right to make changes without prior notice






2020-09-10

# Damper with flow meter

FMDU

## Pressure drop graphs with sound data for dimensioning


The solid lines show the pressure drop,  $\Delta p_t$ , across the unit as a function of flow,  $q$ . The dashed lines give the A-weighted sound power data,  $L_{WA}$ , in dB to the duct. Flow data for balancing differ from these graphs.

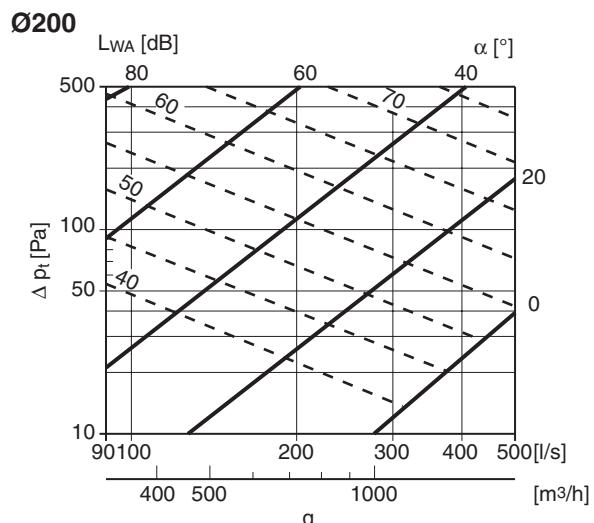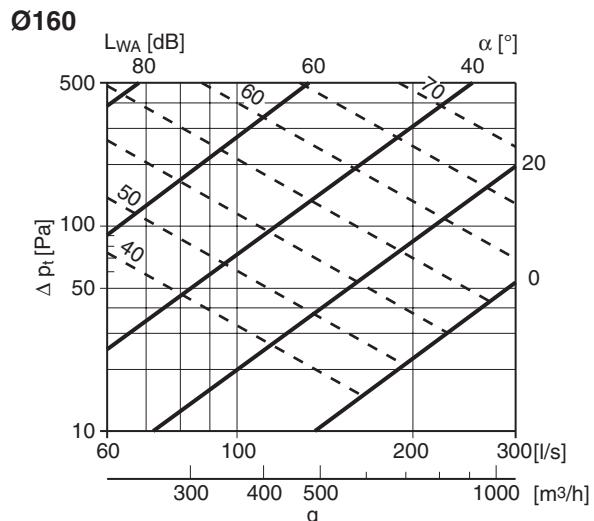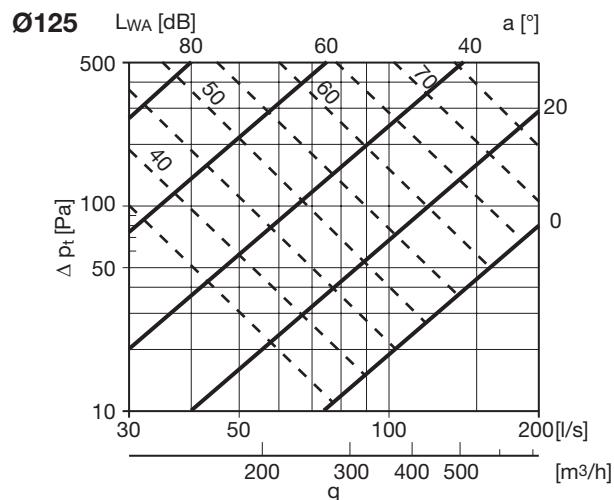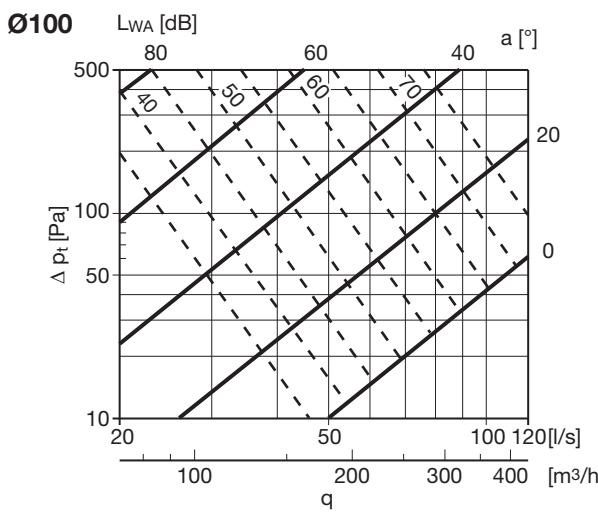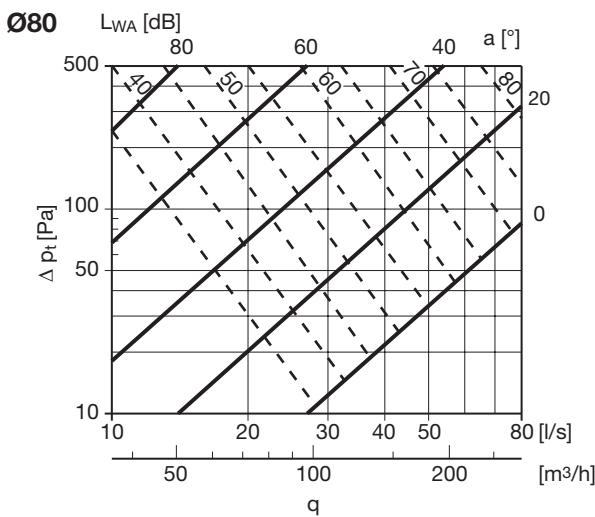


# Damper with flow meter

FMDU


**Ø250**

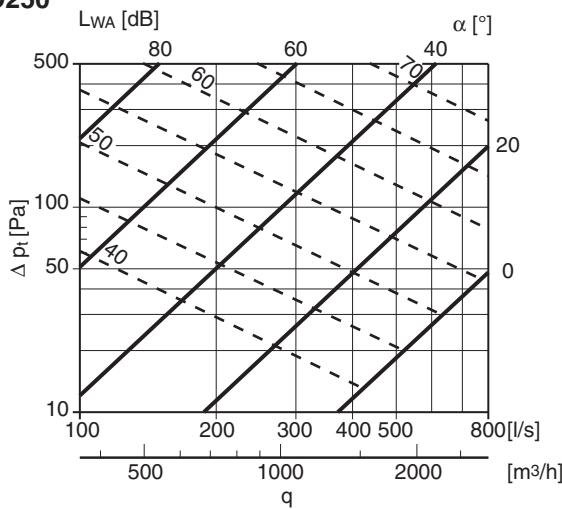


**Ø500**

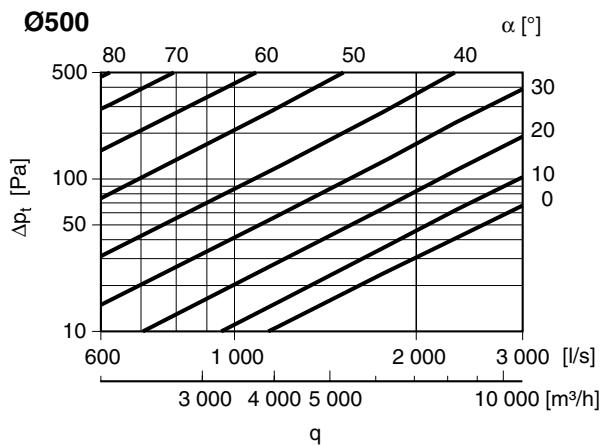


**Ø315**

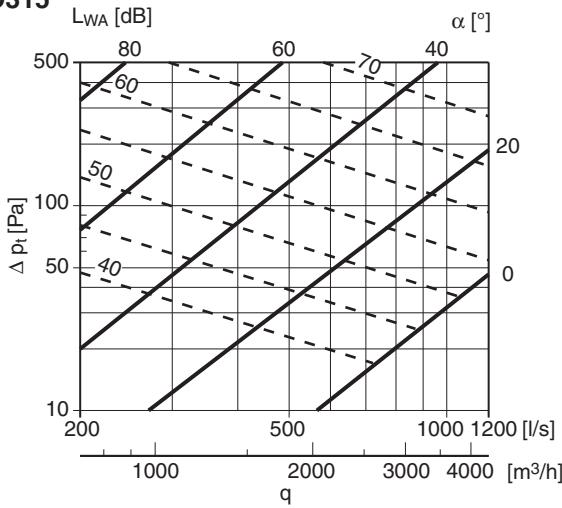

**Ø630**

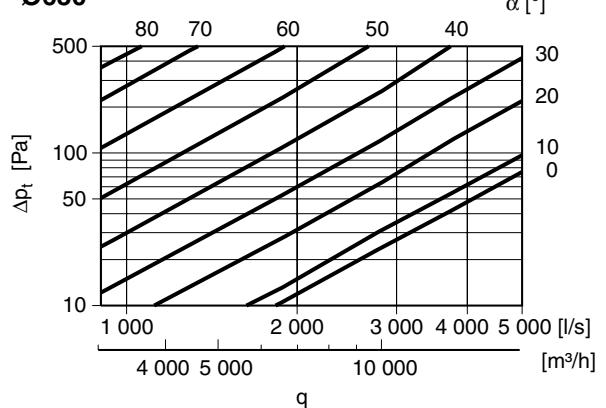

**Ø400**

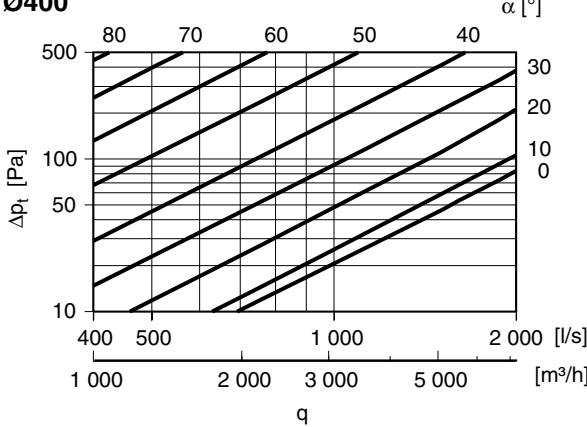

Lindab reserves the right to make changes without prior notice

2020-09-10

# Damper with flow meter

# FMDU

## Sound generation

dim Ød <sub>1</sub>	Pressure loss [Pa]	Velocity app. 5 [m/s]								Velocity app. 10 [m/s]								Velocity app. 15 [m/s]									
		Centre frequency [Hz]								Centre frequency [Hz]								Centre frequency [Hz]									
		63	125	250	500	1k	2k	4k	8k	63	125	250	500	1k	2k	4k	8k	63	125	250	500	1k	2k	4k	8k		
80		Flow 25 [l/s]												Flow 50 [l/s]												Flow 75 [l/s]	
	500 300 200 100 50	64 61 59 56 52	65 62 60 56 52	62 58 56 51 47	59 55 51 45 40	57 52 47 40 33	56 50 46 41 33	52 47 40 33 21	51 43 38 30 28	68 65 63 59 56	76 75 74 72 71	76 75 74 72 71	70 67 64 59 54	64 61 57 52 47	61 57 53 48 40	59 53 48 42 35	56 53 47 41 32	56 53 47 41 26	71 68 67 64 63	80 79 75 64 58	80 77 64 59 54	73 68 64 59 54	67 63 59 54 51	63 60 57 54 42	61 55 51 48 38	58 55 51 46 38	
100		Flow 40 [l/s]												Flow 80 [l/s]												Flow 120 [l/s]	
	500 300 200 100 50	64 61 59 56 52	63 60 58 54 50	62 58 55 51 46	58 54 51 45 40	56 54 51 45 40	55 50 46 39 34	53 50 46 39 33	54 30 28 22 20	67 65 62 59 55	76 76 75 75 74	76 76 75 75 74	69 65 62 57 52	63 59 55 49 44	60 56 52 46 43	61 56 52 46 40	61 56 52 46 39	61 56 52 46 40	70 68 65 62 60	81 81 79 71 61	82 80 79 61 58	70 65 62 58 57	66 62 60 57 56	64 60 57 54 49	64 60 57 54 49	64 60 57 54 49	
125		Flow 60 [l/s]												Flow 120 [l/s]												Flow 180 [l/s]	
	500 300 200 100 50	66 63 61 59 53	64 61 58 55 51	62 59 56 51 47	59 55 51 47 46	56 55 51 46 41	55 53 51 46 40	53 51 46 40 35	53 32 25 21	72 69 67 67 64	76 75 73 74 72	75 73 65 71 69	68 59 56 52 50	63 59 55 52 49	60 56 52 46 43	61 56 52 46 41	59 53 50 46 34	75 73 71 71 67	81 79 76 74 67	79 76 67 63 58	71 71 67 63 55	66 62 59 58 53	63 60 57 54 46	61 58 55 53 43	61 58 55 53 43		
160		Flow 100 [l/s]												Flow 200 [l/s]												Flow 300 [l/s]	
	500 300 200 100 50	66 63 60 58 55	63 60 57 53 50	61 58 55 50 47	57 55 51 46 41	57 54 50 45 41	55 53 51 39 36	52 31 26 23	52 32 25 21	77 75 70 74 69	78 77 70 72 66	73 70 63 62 59	67 65 59 56 50	63 59 54 50 44	60 56 52 46 36	61 56 52 46 33	59 53 50 46 34	80 78 76 74 71	81 79 72 67 62	76 72 67 64 58	71 71 69 64 53	66 62 57 55 46	62 59 55 53 42	61 58 55 53 39	59 55 53 46 31		
200		Flow 150 [l/s]												Flow 300 [l/s]												Flow 450 [l/s]	
	500 300 200 100 50	71 67 65 61 55	68 64 60 58 52	65 61 57 53 49	61 57 53 49 49	58 54 50 45 41	58 54 50 41 36	55 31 26 23	55 37 34 28 23	75 74 70 71 66	77 75 68 66 60	70 65 60 55 50	63 56 50 46 44	60 56 50 46 38	54 50 46 45 37	53 48 42 41 34	53 48 42 41 34	80 77 74 71 66	82 79 74 71 63	78 72 67 63 58	71 71 67 63 55	66 60 57 54 52	63 59 55 53 48	63 59 55 53 44	63 59 55 53 35		
250		Flow 250 [l/s]												Flow 500 [l/s]												Flow 750 [l/s]	
	500 300 200 100 50	69 66 63 60 56	66 63 60 57 53	64 60 57 55 49	61 57 53 50 49	57 54 50 45 44	56 53 49 37 37	53 37 34 25	56 37 34 25	79 77 73 70 61	76 73 68 64 54	72 68 63 57 49	67 62 57 52 40	62 56 51 47 38	61 56 52 47 39	64 59 55 49 38	63 58 53 43 38	83 81 77 72 64	81 77 72 68 60	76 72 65 60 59	72 70 67 63 57	65 62 59 56 55	64 61 59 56 55	66 63 60 57 52	66 63 60 57 52		
315		Flow 400 [l/s]												Flow 800 [l/s]												Flow 1200 [l/s]	
	500 300 200 100 50	76 72 69 64 58	71 67 64 59 55	67 64 59 55 51	62 59 55 49 45	60 48 45 43 37	60 36 30 24	57 39 36 30	57 37 34 24	82 78 73 70 63	79 75 69 64 54	74 66 60 57 40	68 61 54 47 38	66 60 54 46 38	64 56 49 41 34	63 54 48 41 34	65 58 55 43 34	86 82 77 72 64	83 79 72 68 60	77 72 65 60 59	71 67 62 56 51	68 63 60 56 51	66 61 59 56 51	69 66 63 57 51	64 60 57 54 44		



Lindab reserves the right to make changes without prior notice

2020-09-10

