


Access door

KCRU



Dimensions

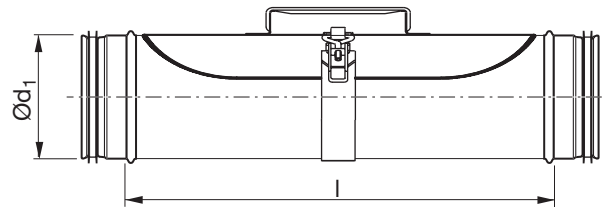

Description

Access door which complies with the requirements for access doors in Swedish Standard SS 2645.

The door is held in place by a tension strap with adjustable eccentric lock. This offers a quick and simple opening and closing. A built-in handle also aids handling.

Ød ₁ nom	l [mm]	m [kg]
100	480	1,06
125	480	1,30
160	480	1,80
200	480	2,00
250	480	2,92
315	480	4,10
400	480	5,51

Ordering example

Product **KCRU** **250**
 Dimension Ød₁

