


Bend

INBU15



Dimensions

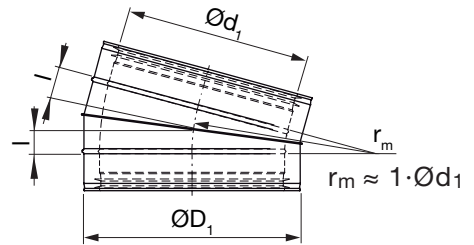

Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

$\varnothing d_1$ nom	$\varnothing D_1$ mm	l mm	m* kg
80	112	13	0,30
100	132	13	0,33
125	157	16	0,42
160	192	21	0,58
180	200	24	0,73
200	232	26	0,79
224	260	30	1,02
250	280	30	1,46
280	315	37	1,94
300	355	39	2,12
315	355	47	2,39

* = weight can vary $\pm 10\%$.

Order code

