

Duct suspension

FB




Description

Suspension band


Suspension bands are designed to suspend air ducts. It is easy to cut and bend and allows a quick and economical method of assembly. The perforated suspension steel band is made of steel with assorted holes, which, according to the type selected, allow fixing of threaded rods, threaded clamps, bolts, etc. The small holes can be used with rivets, screws or nails.

Type	Width mm	Thickness mm	Length m	Material
FB 1	16	0,9	10	galvanized
FB 1	16	0,9	25	galvanized
FB 20	20	0,7	25	galvanized
FB 50	25	0,9	25	galvanized
FB 40	25	0,9	25	galvanized
FB 50	25	1,25	25	galvanized
FB 30	30	0,5	25	stainless
FB 30	30	1,0	25	stainless

Dimensions

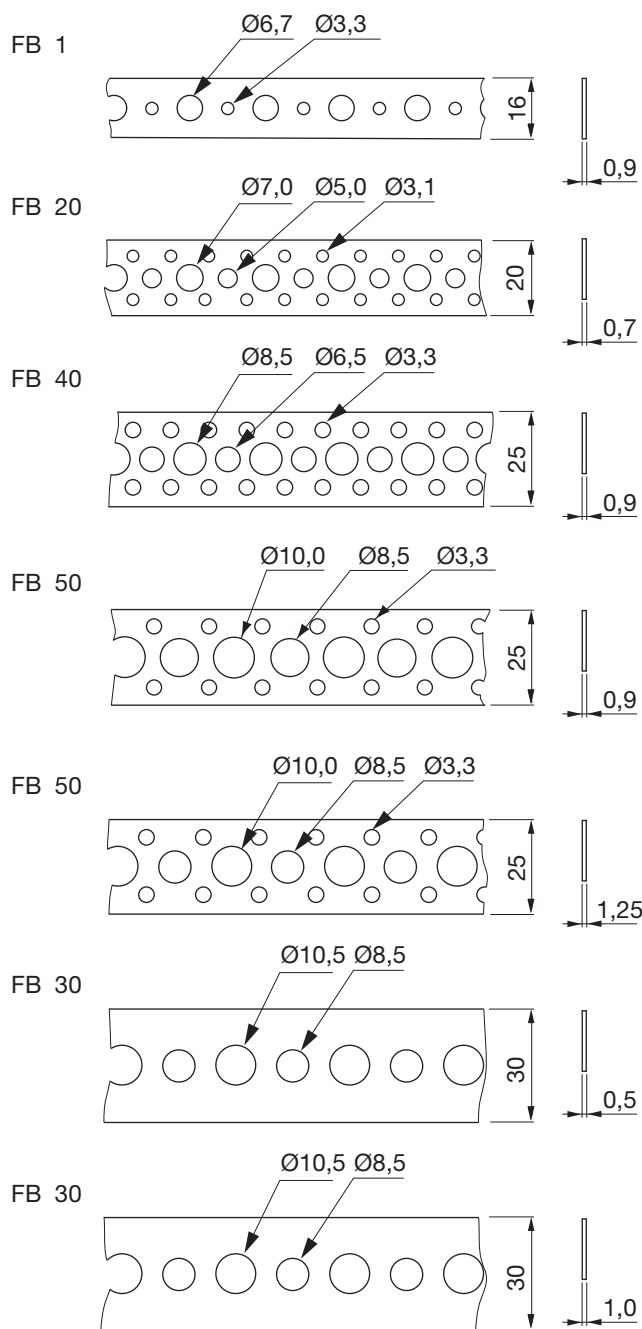

Ordering example

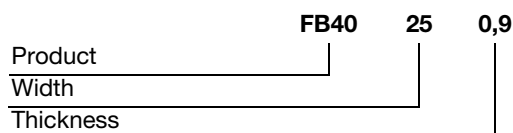

Duct suspension

FB

Technical data

Max recommended load for different fire classes.

Installation		Ventilation system					Smoke control system
Type	Thickness	R0 no fire class. kg	R15 kg	R30 kg	R45 kg	R60 kg	600 °C 120 min kg
FB1	0,9	20	-	-	-	-	-
FB20	0,7	20	-	-	-	-	-
FB40	0,9	80	-	-	-	-	-
FB50	0,9	80	-	-	-	-	-
FB50	1,25	100	50	-	-	-	-
FB30	0,5	80	-	-	-	-	-
FB30	1,0	100	100	100	-	-	-

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18