

Access door

IPRD




Description

Access door, which fits on the flat side of a rectangular duct. Consists of a door and a frame. The door has a 25 mm thick high density insulation. The frame is attached to the duct wall by means of fixing tabs. Both door and frame are supplied with a rubber gasket.

Can achieve maximum tightness class C.

Dimensions

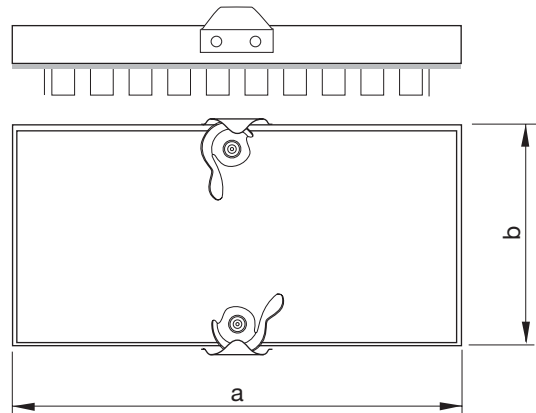

a mm	b mm	m kg
300	150	1,47
400	300	2,46
500	500	4,30

Ordering example

		IPRD	400	300
Product				
Largest side	a			
Smallest side	b			

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18