

# Exhaust valve

# KU



## Description

Valve for exhaust air.  
Designed for wall or ceiling mounting.  
Bayonet holders connect to socket VRGU, VRGL or VRGM.

## Materials and finish


### Material

Powder-coated galvanized sheet metal.

### Colour

White RAL 9003, gloss 30 or white RAL 9010 gloss30.

## Dimensions



Ød nom	ØD [mm]	m [kg]
80	110	0,13
100	130	0,19
125	160	0,27
150	188	0,36
160	190	0,38
200	245	0,58

## Ordering example

Product	<b>KU</b>	<b>125</b>
Dimension Ød		

# Exhaust valve

KU

## Technical data

Air flow,  $q$  [l/s] and [m<sup>3</sup>/h], total pressure drop,  $\Delta p_t$  [Pa], and A-weighted sound power level,  $L_{WA}$  [dB], for different settings,  $a$  [mm], are shown in the graphs.

### Sound power level, $L_{Wok}$ [dB], in octave bands

is calculated as  $L_{WA} + K_{ok}$ .  
 $K_{ok}$  is found in the table below.

Ød nom	Valve mounted in	Centre frequency [Hz]							
		63	125	250	500	1K	2K	4K	8K
100	Duct	-	-8	-5	-6	-6	-4	-12	-21
125	Duct	-	-11	-4	-6	-7	-3	-16	-25
160	Duct	-	-7	-4	-6	-3	-6	-18	-31
200	Duct	-	-7	-6	-7	-2	-9	-18	-27

Tolerance	-	±3	±2	±2	±2	±2	±2	±2	±3
-----------	---	----	----	----	----	----	----	----	----




### Sound attenuation, $\Delta L$ , [dB]

Ød nom	Valve mounted in	Setting $a$ [mm]	Centre frequency [Hz]							
			63	125	250	500	1K	2K	4K	8K
100	Duct	-12	21	18	12	14	12	11	12	15
		-5	21	16	9	11	9	8	8	12
		5	21	16	8	10	8	7	5	11
125	Duct	-17	22	16	11	9	7	7	9	12
		-9	21	16	9	8	5	5	7	8
		5	20	15	9	6	4	3	4	7
160	Duct	-15	19	14	9	8	6	7	9	10
		-5	19	13	9	6	5	4	6	8
		5	18	13	8	5	4	3	6	6
200	Duct	-25	17	12	10	9	9	12	14	12
		0	16	10	7	6	6	6	10	7
		20	16	10	6	4	4	5	9	6

Tolerance	±6	±3	±2	±2	±2	±2	±2	±2	±3
-----------	----	----	----	----	----	----	----	----	----

### Measurement of air flow

Data is available in a separate brochure.

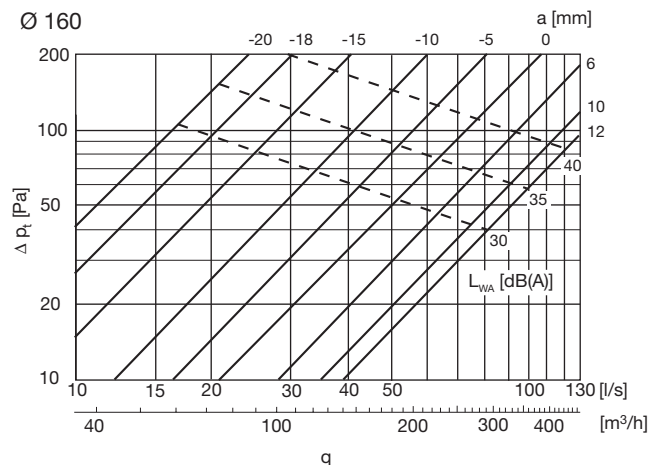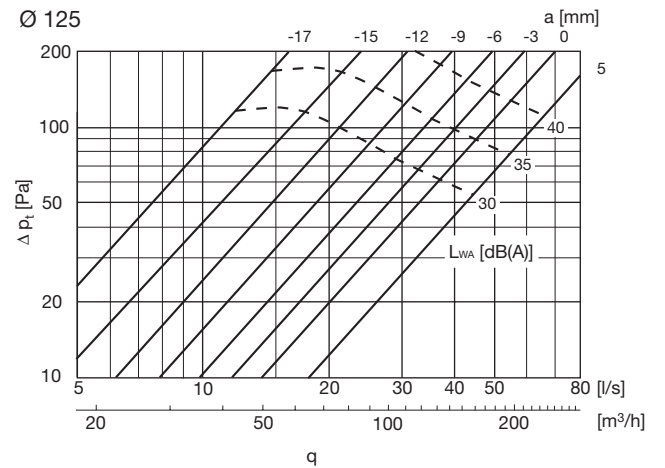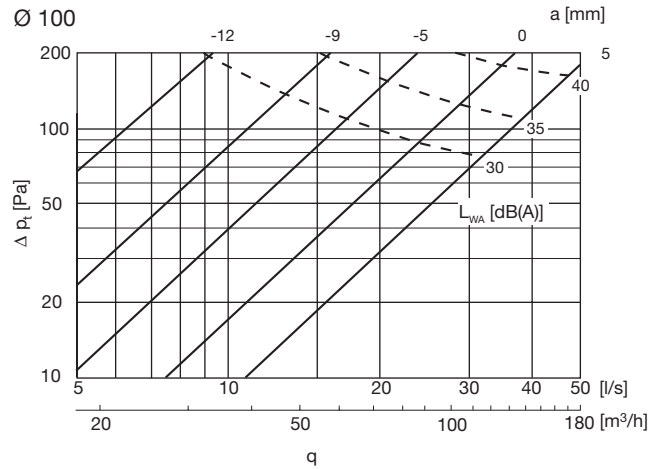

# Exhaust valve

KU

