

# Versio

# RS15



RS15 with grille box type V

## Description

RS15 is a square swirl diffuser with adjustable bars that can be used for both supply and exhaust air. The swirl pattern ensures high induction and a large dynamic range. It is therefore ideal for the horizontal supply of very cold air. The diffuser can also be set to a vertical supply air pattern, enabling supply of heated air. The diffuser is supplied as standard with inward swirl. For exhaust, the diffuser is supplied as standard without bars

- Large dynamic range
- High induction
- Ideal for the supply of very cold air
- Adjustable for horizontal or vertical supply air pattern
- Can be used for both supply air and exhaust

## Order code


<b>Product</b>	RS	15	b	c	d	eee	f
<b>Type</b>	RS						
<b>Design</b>	15						
<b>Box type</b>	V - H - R						
<b>Functional use</b>	S = Supply air E = Exhaust						
<b>Damper</b>	0 = ( : H, V) 1 = ( : H, R) 2 = ( : H)						
<b>Connection dim.</b>	Ø200-315 ( : V) Ø160-315 ( : H) 300x100 - 500x100 ( : R)						
<b>Ceiling system</b>	1 - 14						

Example: RS15-V-S-0-200-1



RS15 with plenum box type H

## Dimensions

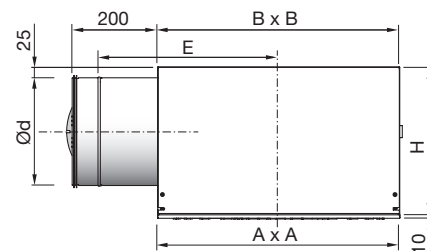

RS15-H	A	B	H	E	m	
Ød	Pattern	mm	mm	mm	kg	
160	400	**-	380	250	350	5.9
200	500	**-	460	290	390	8.5
250	600	**-	560	340	420	12.3

\* Face plate dimension A x A depends on ceiling system. See "Ceiling adjustment" for detailed dimensions. For further details on plenum box - see "Plenum boxes".

## Maintenance

The face plate can be removed to enable cleaning of internal parts or to gain access to the duct or box. The visible parts of the diffuser can be wiped with a damp cloth.

## Materials and finish

### Grille box/plenum box:

Material: Galvanised steel

### Face plate:

Material: Galvanised steel  
 Bars: Black ABS-plastic  
 Standard finish: Powder-coated  
 Standard colour: RAL 9003, gloss 30

The diffuser is available in other colours. Please contact Lindab's sales department for further information.

